


RUBBER-STEEL SEAL MADE OF NBR

0184GS15

Rubber-steel gaskets stand for a proven combination of elasticity and stability. They are used wherever durable sealing and reliable function are required.

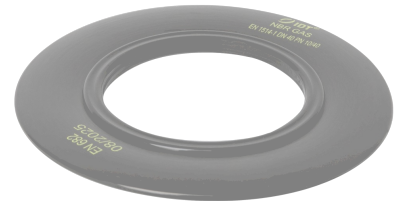

Innovative design

The spherical base body is also designed with a specially designed inner profile as a static sealing element.

The rubber coating is firmly vulcanized to the steel insert, so that a stable bond is achieved that can also withstand high loads. The steel insert increases the blow-out resistance and stability of the sealing system.

Operating data

Temperatur [min]	-25 °C
Temperatur [max]	90 °C
Pressure [max]	40 bar

Approvals and test reports

EN 682

DIN EN13555 (TA Luft 2021)

Flange shapes

Self-centering, Raised Face [form IBC]

GRP flange

Plastic flange

Notes

Proof of the required leakage rate according to TA Luft 2021 (VDI 2290) can be provided by a calculation according to DIN EN 1591-1.

This datasheet on the internet: <https://idt-gaskets.com/products/gaskets/d699d790a295bf1e8>

General information: All information given in this Technical Information sheet represents our current level of knowledge and serves as information on our products and their respective scopes. It is not meant to ensure any particular properties of any product or the suitability of any product for any specific application, neither does it create any liability on our part. © Copyright by IDT

Essen: +49 201 855110 · Annaberg-Buchholz: +49 3733 5050 · München: +49 89 9918830
Further sealing systems and technical information can be found [idt-gaskets.com](https://www.idt-gaskets.com)

Last Changed 2026-06-22